




# Eclisse SYNTESIS® LINE

version **SOLID WALL**


## Counterframe for single door without jambs and architraves

SYNTESIS® LINE is a counterframe for disappearing sliding single door without architraves and jambs. That's a modern solution, perfect for minimalist spaces and slim furniture. The absence of finishing frames gives a new design perfectly integrated with the overall partition.

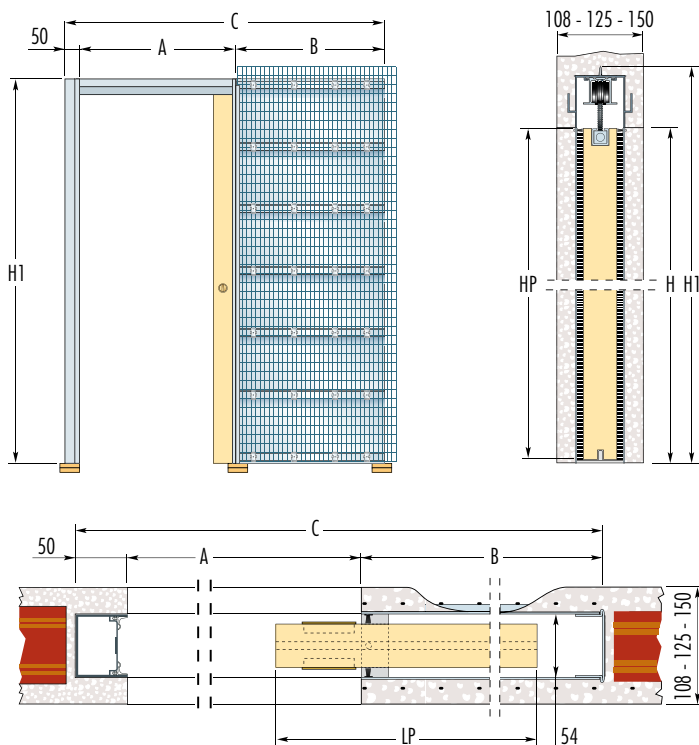

### Warning

The door panel for SYNTESIS® LINE must be milled along the upper and lower profiles, as shown in the drawings (milling not required on all-glass doors)

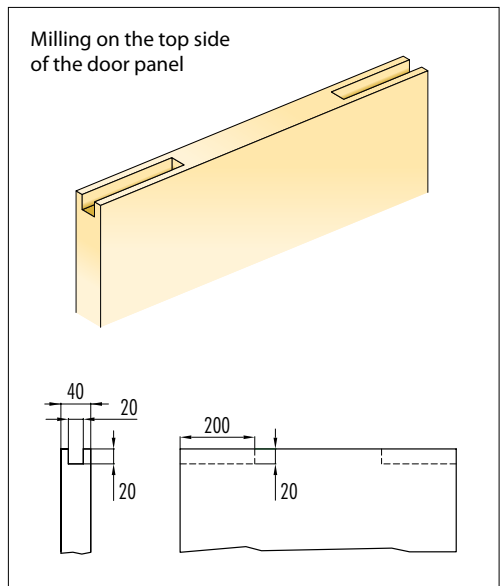

STANDARD COUNTERFRAME				DOOR PANEL		NOTES	
MAX. PASSAGE SIZE A x H	B	OVERALL DIMENSION C x H1	FINISHED WALL	INTERNAL SPACE	LP		HP
600 x 2000/2100	735	1378 x 2060/2160	108/125/150	54	615	1992/2092	<p><b>Non standard sizes:</b> It's possible to produce pocket doors with width from 600 mm to 1300 mm and height from 1000 mm to 2700 mm.</p> <p><b>Warning</b></p> <ul style="list-style-type: none"> <li>▶ The passage <b>A</b> is 7 mm reduced.</li> <li>▶ Mandatory ending thickness <b>125, 150 mm</b> for <b>A</b> more than 1000 mm for any heights.</li> <li>▶ Max door thickness 40 mm (including any aluminum frames).</li> <li>▶ Standard door's weight is 80 kg.</li> </ul>
700 x 2000/2100	835	1578 x 2060/2160	108/125/150	54	715	1992/2092	
800 x 2000/2100	935	1778 x 2060/2160	108/125/150	54	815	1992/2092	
900 x 2000/2100	1035	1978 x 2060/2160	108/125/150	54	915	1992/2092	
1000 x 2000/2100	1135	2178 x 2060/2160	108/125/150	54	1015	1992/2092	

### WARNING

- ▶ Because of production needs and safety reasons of the system, Eclisse expects that the door panel is left protruding 80 mm.
- ▶ If needed, the adjustable rear stop door allows to modify the real passage size.
- ▶ In order to make the door completely disappear a passing routing is required.
- ▶ The routing for the door guide must have the following dimensions: 7 x 15 mm.

dimensions are given in mm

### AVAILABLE ACCESSORIES



**Vitro**  
Adapter for all-glass doors with stainless steel veil (picture 1), accessories for stop jamb and brush holder in aluminum coated with paintable PVC (picture 2).

- ▶ For Double doors model it's required the purchase of two Vitro
- ▶ Vitro is feasible only with all-glass door panel with max thickness 10 mm. Applications in glass fusing are not allowed.



**Under Door Profile**  
It prevents sliding problems because of swelling, caused by moisture

### ADVANTAGES - The counterframes by ECLISSE are:

- Robust for greater reliability and duration.
- They can be checked to have doors always sliding properly.
- They can be customised with accessories to make your rooms more practical.


# Eclisse SYNTESIS® LINE

version **STUD WALL**



## Counterframe for single door without jambs and architraves



SYNTESIS® LINE is a counterframe for disappearing sliding single door without architraves and jambs. That's a modern solution, perfect for minimalist spaces and slim furniture. The absence of finishing frames gives a new design perfectly integrated with the overall partition.

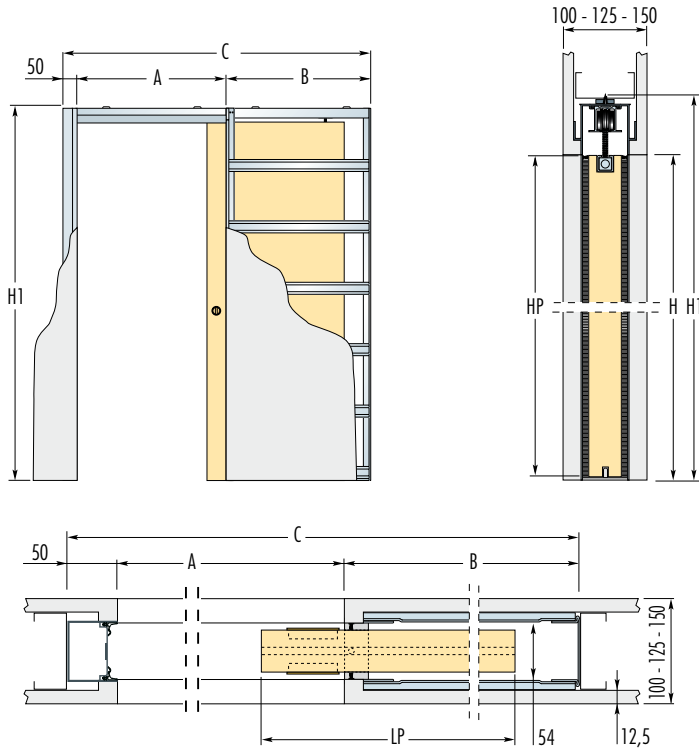

### Warning

The door panel for SYNTESIS® LINE must be milled along the upper and lower profiles, as shown in the drawings (milling not require on all-glass doors)

#### Milling on the top side of the door panel

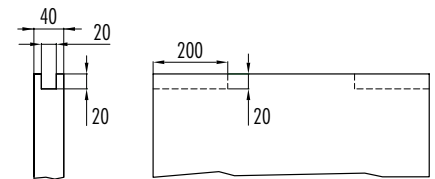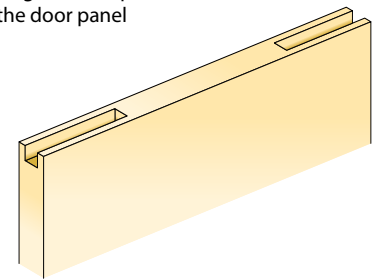

STANDARD COUNTERFRAME				DOOR PANEL		NOTES	
MAX. PASSAGE SIZE A x H	B	OVERALL DIMENSION C x H1	FINISHED WALL	INTERNAL SPACE	LP	HP	
600 x 2000/2100	735	1378 x 2060/2160	100/125/150	54	615	1992/2092	<p><b>Non standard sizes:</b> It's possible to produce pocket doors with width from 600 mm to 1300 mm and height from 1000 mm to 2700 mm.</p> <p><b>Warning</b></p> <ul style="list-style-type: none"> <li>▶ The passage <b>A</b> is 7 mm reduced.</li> <li>▶ Mandatory ending thickness <b>125, 150 mm</b> for <b>H</b> starting from 2150 mm; <b>A</b> more than 1000 mm for any heights.</li> <li>▶ Max door thickness 40 mm (including any aluminum frames).</li> <li>▶ Standard door's weight is 80 kg.</li> </ul>
700 x 2000/2100	835	1578 x 2060/2160	100/125/150	54	715	1992/2092	
800 x 2000/2100	935	1778 x 2060/2160	100/125/150	54	815	1992/2092	
900 x 2000/2100	1035	1978 x 2060/2160	100/125/150	54	915	1992/2092	
1000 x 2000/2100	1135	2178 x 2060/2160	100/125/150	54	1015	1992/2092	

**WARNING**

- ▶ Because of production needs and safety reasons of the system, Eclisse expects that the door panel is left protruding 80 mm.
- ▶ If needed, the adjustable rear stop door allows to modify the real passage size.
- ▶ In order to make the door completely disappear a passing routing is required.
- ▶ The routing for the door guide must have the following dimensions: 7 x 15 mm.

dimensions are given in mm

### AVAILABLE ACCESSORIES



#### Vitro

Adapter for all-glass doors with stainless steel veil (picture 1), accessories for stop jamb and brush holder in aluminum coated with paintable PVC (picture 2).

- ▶ For Double doors model it's required the purchase of two Vitro
- ▶ Vitro is feasible only with all-glass door panel with max thickness 10 mm. Applications in glass fusing are not allowed.

#### Under Door Profile

It prevents sliding problems because of swelling, caused by moisture

### ADVANTAGES - The counterframes by ECLISSE are:

- Robust for greater reliability and duration.
- They can be checked to have doors always sliding properly.
- They can be customised with accessories to make your rooms more practical.





# Eclisse SYNTESIS® LINE DD

version **SOLID WALL**

## Counterframe for two mirror-like doors without jambs and architraves


SYNTESIS® LINE is a counterframe door without architraves and jamb which hosts two opposed disappearing sliding doors. That's a modern solution, perfect for minimalist spaces and slim furniture. The absence of finishing frames enhances a design perfectly integrated with the overall partition.

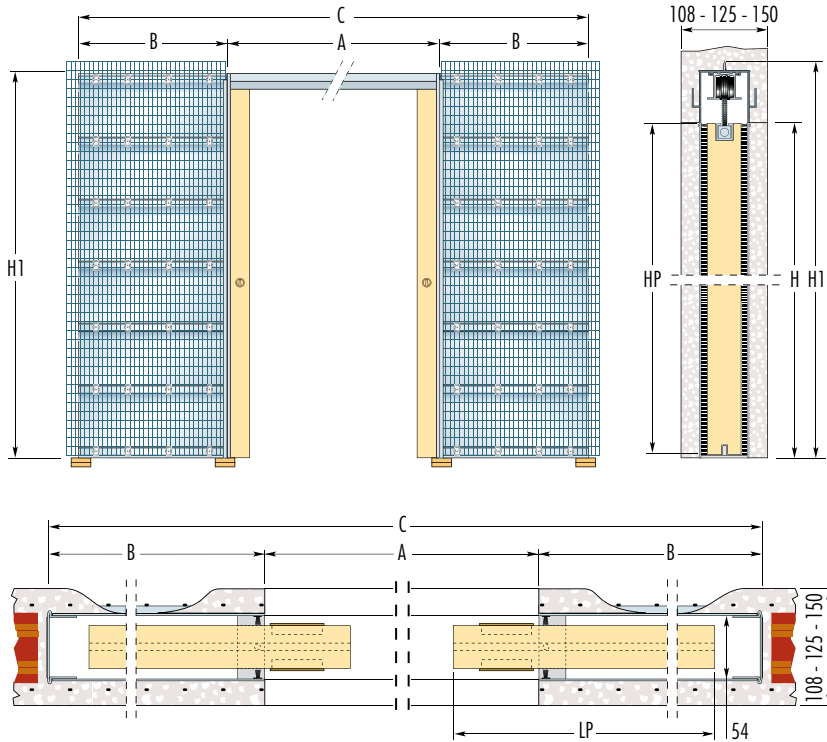

### Warning

The door panel for SYNTESIS® LINE must be milled along the upper and lower profiles, as shown in the drawings (milling not require on all-glass doors)

#### Milling on the top side of the door panel

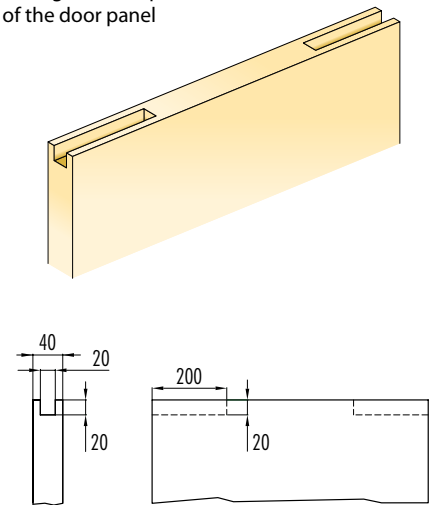

MAX. PASSAGE SIZE A x H	STANDARD COUNTERFRAME			DOOR PANEL		
	B	OVERALL DIMENSION C x H1	FINISHED WALL	INTERNAL SPACE	LP	HP
1200 x 2000/2100	735	2656 x 2060/2160	108/125/150	54	615	1992/2092
1400 x 2000/2100	835	3056 x 2060/2160	108/125/150	54	715	1992/2092
1600 x 2000/2100	935	3456 x 2060/2160	108/125/150	54	815	1992/2092
1800 x 2000/2100	1035	3856 x 2060/2160	108/125/150	54	915	1992/2092
2000 x 2000/2100	1135	4256 x 2060/2160	108/125/150	54	1015	1992/2092

### NOTES

**Non standard sizes:** It's possible to produce pocket doors with width from 1200 mm to 2600 mm and height from 1000 mm to 2700 mm.

#### Warning

- ▶ The passage **A** is 7 mm reduced.
- ▶ Mandatory ending thickness **125, 150 mm** for **A** more than 2000 mm for any heights.
- ▶ Max door thickness 40 mm (including any aluminum frames).
- ▶ Standard door's weight is 80 kg.

#### WARNING

- ▶ Because of production needs and safety reasons of the system, Eclisse expects that the door panel is left protruding 80 mm.
- ▶ If needed, the adjustable rear stop door allows to modify the real passage size.
- ▶ In order to make the door completely disappear a passing routing is required.
- ▶ The routing for the door guide must have the following dimensions: 7 x 15 mm.

dimensions are given in mm

### AVAILABLE ACCESSORIES



#### Vitro

Adapter for all-glass doors with stainless steel veil (picture 1), accessories for stop jamb and brush holder in aluminum coated with paintable PVC (picture 2).

- ▶ For Double doors model it's required the purchase of two Vitro
- ▶ Vitro is feasible only with all-glass door panel with max thickness 10 mm. Applications in glass fusing are not allowed.



#### Under Door Profile

It prevents sliding problems because of swelling, caused by moisture

### ADVANTAGES - The counterframes by ECLISSE are:

- Robust for greater reliability and duration.
- They can be checked to have doors always sliding properly.
- They can be customised with accessories to make your rooms more practical.





# Eclisse SYNTESIS® LINE DD

version **STUD WALL**

## Counterframe for two mirror-like doors without jambs and architraves



SYNTESIS® LINE is a counterframe door without architraves and jamb which hosts two opposed disappearing sliding doors. That's a modern solution, perfect for minimalist spaces and slim furniture. The absence of finishing frames enhances a design perfectly integrated with the overall partition.

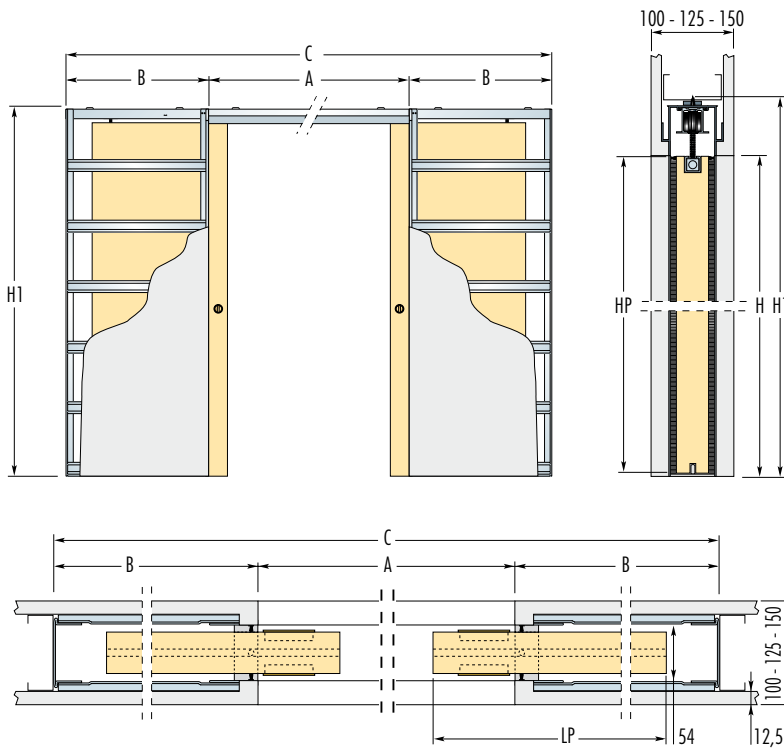

### Warning

The door panel for SYNTESIS® LINE must be milled along the upper and lower profiles, as shown in the drawings (milling not require on all-glass doors)

#### Milling on the top side of the door panel

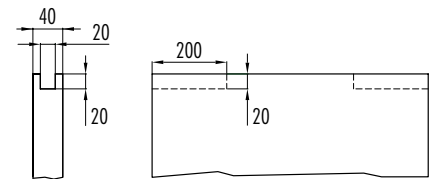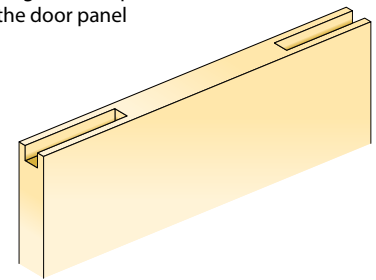

STANDARD COUNTERFRAME				DOOR PANEL		NOTES
MAX. PASSAGE SIZE A x H	B	OVERALL DIMENSION C x H1	FINISHED WALL	INTERNAL SPACE	LP	
1200 x 2000/2100	735	2656 x 2060/2160	100/125/150	54	615	1992/2092
1400 x 2000/2100	835	3056 x 2060/2160	100/125/150	54	715	1992/2092
1600 x 2000/2100	935	3456 x 2060/2160	100/125/150	54	815	1992/2092
1800 x 2000/2100	1035	3856 x 2060/2160	100/125/150	54	915	1992/2092
2000 x 2000/2100	1135	4256 x 2060/2160	100/125/150	54	1015	1992/2092

**Non standard sizes:** It's possible to produce pocket doors with width from 600 mm to 1300 mm and height from 1000 mm to 2700 mm.

#### Warning

- ▶ The passage **A** is 7 mm reduced.
- ▶ Mandatory ending thickness **125, 150 mm** for **H** starting from 2150 mm; **A** more than 2000 mm for any heights.
- ▶ Max door thickness 40 mm (including any aluminum frames).
- ▶ Standard door's weight is 80 kg.

#### WARNING

- ▶ Because of production needs and safety reasons of the system, Eclisse expects that the door panel is left protruding 80 mm.
- ▶ If needed, the adjustable rear stop door allows to modify the real passage size.
- ▶ In order to make the door completely disappear a passing routing is required.
- ▶ The routing for the door guide must have the following dimensions: 7 x 15 mm.

dimensions are given in mm

#### AVAILABLE ACCESSORIES



#### Vitro

Adapter for all-glass doors with stainless steel veil (picture 1), accessories for stop jamb and brush holder in aluminum coated with paintable PVC (picture 2).

- ▶ For Double doors model it's required the purchase of two Vitro
- ▶ Vitro is feasible only with all-glass door panel with max thickness 10 mm. Applications in glass fusing are not allowed.

#### Under Door Profile

It prevents sliding problems because of swelling, caused by moisture

#### ADVANTAGES - The counterframes by ECLISSE are:

- Robust for greater reliability and duration.
- They can be checked to have doors always sliding properly.
- They can be customised with accessories to make your rooms more practical.